

MMA10G-TRS4K-N

Standalone IPMX-Ready 4K/60 HDMI Gateway



CONNECT. COLLABORATE. SHARE RESOURCES. MANAGE.

Evertz' MMA-10G is a network-based AV distribution solution constructed using Evertz' award winning SDVN (Software Defined Video Network) architecture. MMA-10G utilizes a highly reliable 10GE infrastructure for routing video and audio and offers unprecedented scalability and reliability.



Key Features

- One HDMI 2.0a input and one HDMI 2.0a output
- Resolution up to 4096x2160p @ 60 Hz, 4:4:4 color sampling
- IPMX-ready with support for JPEG-XS, AES67, PTP, and more
- Ultra low latency transport over 10GE links
- Customizable EDID tables
- Full integration with MAGNUM-AV management system
- Remote monitoring capabilities using SNMP protocol



Standalone 4K Gateway

The MMA10G-TRS4K-N standalone 10GE gateway accepts one HDMI input and one HDMI output. The MMA10G-TRS4K-N is a standalone device which is compact and quiet and can be installed in various in room locations, including behind monitors, and under/inside desks, lecterAns, and floor boxes. In addition to one HDMI input and output the MMA10G-TRS4K-N also accepts a discrete audio input and output.

Live AV Transport

Using 10Gbps Ethernet the MMA10G-TRS4K-N encapsulates video, audio, HID, and Ethernet control data at the same time. The MMA10G-TRS4K-N has one HDMI 2.0a 4K (up to 4096x2160p @ 60 Hz, 4:4:4 color sampling) input port and one HDMI 2.0a output port

and transports them with ultra low latency over its 10GE links. Customizable EDID tables and scaling on the output paths insure the smoothest handoff between sources and sinks.

IPMX - Bringing ProAV and Broadcast Closer Together

The MMA10G-TRS4K-N is a gateway that conforms to the emerging AV-over-IP open standard IPMX and, as such, complies with the suite of standards detailed in SMPTE ST 2110 and supports features such as JPEG-XS, AES67, and PTP. EvertzAV's line of IPMX-ready gateways provide synchronized, real-time broadcast-quality AV over IP while ensuring the ProAV interoperability requirements of today and tomorrow are met.

Fully integrated with Evertz' MAGNUM-AV Controller


MMA10G-TRS4K-N is a managed element of the MMA-10G network which is controlled by MAGNUM-AV. MAGNUM-AV simplifies management and control over the system and allows for simple user control using EvertzAV's virtual control panels and touch friendly graphical user interfaces (VUE) or via third-party control systems.

Remote Monitoring

The MMA10G-TRS4K-N can be remotely monitored via the SNMP protocol using Evertz' award winning VistaLINK Pro NMS software suite. VistaLINK allows a single user from a single workstation complete visibility into the operation of the MMA-10G ecosystem. Users can prevent issues from becoming outages quickly and easily using Evertz' VistaLINK Pro.

Front

Rear

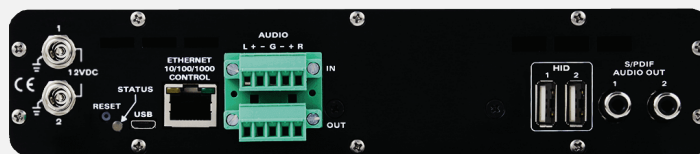

av.evertz.com

Contents Subject to Change
Rev. 02

North America/International AV Sales

avsales@evertz.com

+1 905-335-3700

MMA10G-TRS4K-N

Standalone IPMX-Ready 4K/60 HDMI Gateway



CONNECT. COLLABORATE. SHARE RESOURCES. MANAGE.

Specifications

Video Inputs	1 HDMI 2.0a
Video Outputs	1 HDMI 2.0a
Supported Resolutions	Up to 4096x2160p @ 60 Hz (4:4:4 color sampling)
Audio Inputs	1 stereo balanced analog (terminal header)
Audio Input Impedance	High impedance
Audio Input Level	Line level (+4dBu)
Audio Outputs	1 stereo balanced analog (terminal header) 2 S/PDIF
Audio Output Impedance	600 Ω
Audio Output Level	Line level (+4dBu)
USB	2 HID device ports (type A) 1 HID host port (micro type B)
Ethernet Transport	10/100/1000 BASE -T RJ45 Ethernet Port (IEEE 802.3)
Ethernet Connector	RJ45
10GE Outputs	2 SFP+ (see available accessories)
10G Redundancy	Yes
Output Scaling	Yes
HDMI Audio	LPCM (up to 8 channels) Passthrough support for Dolby Digital [®] /AC-3, Dolby Digital EX, Dolby Digital Plus, Dolby TrueHD, Dolby Atmos, DTS [®] , DTS-ES, DTS-HD High Res, DTS-HD Master Audio, DTS:X
IPMX Support	SMPTE ST 2110, JPEG-XS, AES67, PTP
SNMP Support	Yes
In-Band Control	Yes
Control System	MAGNUM-AV
Web-Based Configuration	Yes
Security Compliance	Compliant with applicable DoD Network Devices Security Technical Implementation Guide (STIG) findings
DC Input Voltage	12VDC via supplied power adapter
Power Supply	100-240V / 47-63Hz AC input; 12VDC / 5A output
Power Consumption	30W
Operating Temperature	32° to 104° F (0° to 40° C)
Relative Humidity	10% to 90% RH (non-condensing)
Dimensions (H x W x D)	1.81in x 8.25in x 6.56in (45.97mm x 209.55mm x 166.62mm)
Weight	32 oz (907.19 g)

Ordering Information

MMA10G-TRS4K-N	Standalone IPMX-ready 4K/60 HDMI gateway: HDMI input or output, audio, HID USB, and Ethernet
----------------	--

Available Accessories

MMA10G-SFP-TR85	SFP+, 10GE, 850nm, MMF, 50/125, LC/LC
MMA10G-SFP2-TR13	SFP+, 10GE, 1310nm, SMF, 9/125, LC/LC, 10Km
MMA10G-SFP-SFP-MM3	3m SFP+ to SFP+ fiber patch cable, 10GE, AOC, 850nm
3405PS-6HO	Six output primary and redundant auto-ranging power supply, 100V - 240V AC at 50/60Hz

EvertzAV, the EvertzAV logo, and VistaLINK are either trademarks or registered trademarks of Evertz Microsystems Ltd. HDMI and the HDMI logo are either trademarks or registered trademarks of HDMI Licensing LLC. Other trademarks, registered trademarks, and trade names mentioned in this document may refer to either the entities claiming the marks and names or their products and are hereby acknowledged. © 2022 Evertz Microsystems Ltd.



av.evertz.com

Contents Subject to Change
Rev. 02

North America/International AV Sales

avsales@evertz.com

+1 905-335-3700