

UXP-RXSQ

Fanless Standalone Single-Channel HDMI AV Receiver



NUCLEUS
AV OVER IP - SIMPLIFIED

EvertzAV's NUCLEUS is an AV over IP platform developed exclusively for enterprises looking for the highest in quality and reliability while maintaining a simplified user experience.



Key Features

- One HDMI output (HDMI type A)
- Resolution up to 3840x2160p @ 30 Hz
- RS-232/RS-422 support for serial communication/control
- Fanless device passively cooled by convection air flow
- Dual receive mode allowing for Picture-in-Picture (PiP) functionality
- 802.3at Type 2 PoE+ support
- Auto-discovery and simplified provisioning features
- Ultra low latency transport over 1GE/2.5GE links
- Third-party control support



and control. Pair the UXP-RXSQ with EvertzAV's UXP-TXSQ single-channel HDMI AV transmitter for an unbeatable low-cost AV transport solution.


Fully Integrated with the NUCLEUS Platform

The UXP-RXSQ is a managed element of the NUCLEUS platform which is controlled by the NUCLEUS Session Manager – a full featured centralized management server used for the configuration, control, and orchestration of the UXP AV gateways. Any combination of UXP AV gateways can be interconnected using a COTS (Commercial Off The Shelf) network switch and then configured and managed by the NUCLEUS Session Manager.

No Fuss Setup, No Programming Required

The NUCLEUS platform operates on a simplified configuration framework allowing administrators the ability to set up a fully functional AV distribution network in no time at all without the hassles associated with most AV distribution platforms available on the market today. The process has been streamlined so that a UXP AV gateway can be taken out of the box and be put to use in less than five minutes. Whether big or small, deployments of all sizes are handled the same way, using the same consistent process.

Inputs and Outputs

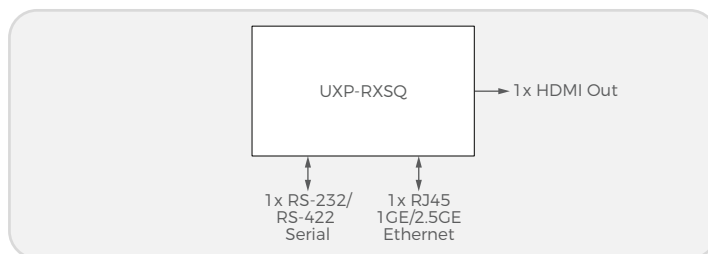

Standalone AV Receiver

The UXP-RXSQ AV receiver is a no-nonsense, cost-effective, single-channel HDMI video and audio receive gateway. It is a compact and quiet standalone device that dissipates heat by convection air flow with the use of a heatsink, and with proper mounting, it can be installed in various in room locations, including behind monitors, and under desks, lecterns, and floor boxes. Reduce decision making at design time by simply adding up and ordering the number of receiving end points you need in your system.


Live AV Over IP Transport

The UXP-RXSQ has one HDMI output port supporting resolutions of up to 3840x2160p @ 30 Hz and receives AV content with ultra low latency over its transport links. Additional functionality includes support for PiP, 802.3at Type 2 PoE+, and RS-232/RS-422 for serial communication

Front



Rear

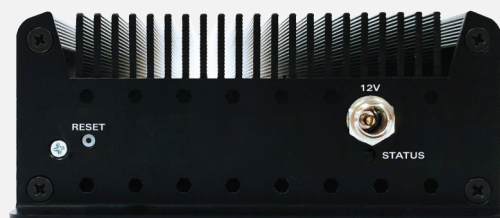

av.evertz.com

Contents Subject to Change
Rev. 01

North America/International AV Sales

avsales@evertz.com

+1 905-335-3700

UXP-RXSQ

Fanless Standalone Single-Channel HDMI AV Receiver



NUCLEUS
AV OVER IP - SIMPLIFIED

Specifications

| | |
|----------------------------------|---|
| Video Outputs | 1 HDMI (type A) |
| Supported Resolutions | Up to 3840x2160p @ 30 Hz |
| Ethernet Transport | 1000BASE-T RJ45 Ethernet Port (IEEE 802.3) |
| Ethernet Connector | RJ45 |
| Transport Ports | 1 2.5GE RJ45 port |
| RS-232/RS-422 | M5 DIN connector (Optional M5 to DB9 converter cable available – see Available Accessories) |
| Output Scaling | Yes |
| Picture-in-Picture (PiP) Support | Yes |
| HDMI Audio | Yes |
| In-Band Control | Yes |
| Control System | NUCLEUS Session Manager |
| Web-Based Configuration | Yes (via NUCLEUS Session Manager) |
| Security Compliance | Compliant with applicable DoD Network Devices Security Technical Implementation Guide (STIG) |
| DC Input Voltage | 12VDC (via optional power adapter – see Available Accessories) |
| Power Supply | 802.3at Type 2 PoE+ (provides power to device over Cat6a/Cat7 cable) (Optional power supply available – see Available Accessories) |
| Power Consumption | 23W |
| Ambient Operating Temperature | 32° to 104° F (0° to 40° C) |
| Relative Humidity | 10% to 90% RH (non-condensing) |
| Dimensions (H x W x D) | 1.75in x 4.13in x 7.43in (44.45mm x 104.90mm x 188mm) |
| Weight | 29.95 oz (849 g) |

Ordering Information

| | |
|----------|---|
| UXP-RXSQ | Fanless standalone 1GE/2.5GE receiver: single HDMI output with PiP, PoE+, and RS-232/RS-422 support |
|----------|---|

Available Accessories

| | |
|-----------------------|---|
| UXP-CBL-DB9MDTE-4P-15 | 4 pin to DB9 (male) serial cable, 1.5m length |
| UXP-CBL-DB9-4P-15 | 4 pin to DB9 (female) serial cable, 1.5m length |
| UXP-PS-12V5A | Power supply (100-240V / 47-63Hz AC input; 12VDC / 5A output) |

*Please refer to the "UXP-TRXSQ-USB2/TXSQ/TXSQ-2/TXSQ-2-USB2-P/RXSQ Installation Notes" for instructions on how to properly mount your UXP AV gateway.

EvertzAV and the EvertzAV logo are either trademarks or registered trademarks of Evertz Microsystems Ltd. HDMI and the HDMI logo are either trademarks or registered trademarks of HDMI Licensing LLC. Other trademarks, registered trademarks, and trade names mentioned in this document may refer to either the entities claiming the marks and names or their products and are hereby acknowledged. © 2022 Evertz Microsystems Ltd.



av.evertz.com

Contents Subject to Change
Rev. 01

North America/International AV Sales

avsales@evertz.com

+1 905-335-3700