

UXP-TRXS4K-RJ

Standalone 4K60 AV Gateway



NUCLEUS
AV OVER IP - SIMPLIFIED

EvertzAV's NUCLEUS is an AV over IP platform developed exclusively for enterprises looking for the highest in quality and reliability while maintaining a simplified user experience.



Key Features

- One HDMI input and one HDMI output (HDMI type A)
- Resolution up to 4096x2160p @ 60 Hz
- RS-232/RS-422 serial port
- Standalone device with low profile form factor
- 1/2.5GE RJ45 Ethernet support
- Ultra low latency transport over transport links
- Third-party control support



Fully Integrated with the NUCLEUS Platform

The UXP-TRXS4K-RJ is a managed element of the NUCLEUS platform which is controlled by the NUCLEUS Session Manager – a full featured centralized management server used for the configuration, control, and orchestration of the UXP AV gateways. Any combination of UXP AV gateways can be interconnected using a COTS (Commercial Off The Shelf) network switch and then configured and managed by the NUCLEUS Session Manager.

Easy Setup. No Programming Required

The NUCLEUS platform operates on a simplified configuration framework allowing administrators the ability to set up a fully functional AV distribution network in no time at all without the hassles associated with most AV distribution platforms available on the market today. The process has been streamlined so that a UXP AV gateway can be taken out of the box and be put to use in less than five minutes. Whether big or small, deployments of all sizes are handled the same way, using the same consistent process.


Standalone AV Gateway

The UXP-TRXS4K-RJ standalone AV gateway is a device that can either be used as a receiver, a transmitter, or both at the same time. Leveraging the bi-directional capabilities of the transport link, the UXP-TRXS4K-RJ can be used to both send and receive HDMI video, audio, and serial. Reduce decision making at design time by simply adding up the number of devices that need to either send or receive as the UXP-TRXS4K-RJ can be used for any connection point.

Live AV Over IP Transport

Using 1/2.5G Ethernet, the UXP-TRXS4K-RJ both encapsulates and de-encapsulates video and audio simultaneously. The UXP-TRXS4K-RJ has two HDMI ports (one receive and one transmit, supporting resolutions of up to 4096x2160p @ 60 Hz) and transports them with ultra low latency over its transport links. The UXP-TRXS4K-RJ supports both embedded audio on HDMI and an RS-232/RS-422 port is available for serial communication, transport, and control.

Inputs and Outputs

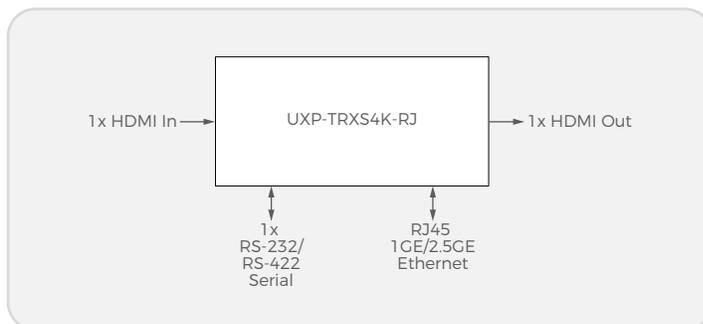

Front



Rear



av.evertz.com

Contents Subject to Change
Rev. 01

North America/International AV Sales

avsales@evertz.com

+1 905-335-3700

UXP-TRXS4K-RJ

Standalone 4K60 AV Gateway



NUCLEUS

AV OVER IP - SIMPLIFIED

Specifications

Video Inputs	1 HDMI (type A)
Video Outputs	1 HDMI (type A)
Supported Resolutions	Up to 4096x2160p @ 60 Hz
Control Port (Out-of-Band)	No
Transport Port	1 2.5GE/1GE Multi-Gigabit port
RS-232/RS-422	M5 DIN connector (optional M5 to DB9 converter cable available - see Available Accessories)
Output Scaling	Yes
HDMI Audio	LPCM (up to 8 channels) Passthrough support for Dolby Digital [®] /AC-3, Dolby Digital EX, Dolby Digital Plus, Dolby TrueHD, Dolby Atmos, DTS [®] , DTS-ES, DTS-HD High Res, DTS-HD Master Audio, DTS:X
In-Band Control	Yes
Control System	NUCLEUS Session Manager
Web-Based Configuration	Yes (via NUCLEUS Session Manager)
Security Compliance	Tested against US Department of Defense (DoD) Security Technical Implementation Guides (STIGs)
DC Input Voltage	12VDC via supplied power adapter
Power Supply	100-240V / 47-63Hz AC input; 12VDC / 5A output
Power Consumption	TBD
Ambient Operating Temperature	32° to 104° F (0° to 40° C)
Relative Humidity	10% to 90% RH (non-condensing)
Dimensions (H x W x D)	1.30in x 4.13in x 7.48in (33mm x 105mm x 188.72mm)
Weight	TBD

Ordering Information

UXP-TRXS4K-RJ	Standalone 4K60 2.5GE transceiver: single HDMI input, single HDMI output, RS-232/422 serial port, and RJ45 Ethernet
---------------	---

Available Accessories

UXP-CBL-DB9MDTE-4P-15	4 pin to DB9 (male) serial cable, 1.5m length
UXP-CBL-DB9-4P-15	4 pin to DB9 (female) serial cable, 1.5m length
UXP-PS-12V5A	Power supply (100-240V / 47-63Hz AC input; 12VDC / 5A output)

EvertzAV and the EvertzAV logo are either trademarks or registered trademarks of Evertz Microsystems Ltd. HDMI and the HDMI logo are either trademarks or registered trademarks of HDMI Licensing LLC. The USB logo is a trademark of the Universal Serial Bus Implementers Forum, Inc.. Other trademarks, registered trademarks, and trade names mentioned in this document may refer to either the entities claiming the marks and names or their products and are hereby acknowledged. © 2025 Evertz Microsystems Ltd.



av.evertz.com

Contents Subject to Change
Rev. 01

North America/International AV Sales

avsales@evertz.com

+1 905-335-3700