

# UXP-HUBA-32x32

Network-Enabled 32x32 Analog Audio Switch with Dante™



**NUCLEUS**

AV OVER IP - SIMPLIFIED

EvertzAV's NUCLEUS is an AV over IP platform developed exclusively for enterprises looking for the highest in quality and reliability while maintaining a simplified user experience.



## Key Features



- 32 mono (or 16 balanced stereo) analog audio inputs
- 32 mono (or 16 balanced stereo) analog audio outputs
- 2 SFP+ ports allow for the transmission and reception of up to 32 ST302M stereo pairs
- Dante™ audio module included allowing for up to 32x32 simultaneous Dante audio streams
- 11-step attenuation control on analog audio outputs
- Auto-discovery and simplified provisioning features
- Third-party control support
- Web-based configuration

## Audio Switching Powerhouse

The UXP-HUBA-32x32 is a versatile professional audio switch designed to support seamless internal switching from any of its inputs to any of its outputs. With 32 mono channel (16 balanced stereo) line level analog audio inputs and outputs, Dante audio interoperability, and support for 32 ST302M stereo pairs on both of its SFP+ ports, the UXP-HUBA-32x32 is an audio switching powerhouse. Leveraging Evertz's award winning SDVN technology, the UXP-HUBA-32x32 affords you the benefits of using 1Gbps or 10Gbps Ethernet to interface with external audio systems using a single link to the switch fabric.


## Robust Supplementary Feature Set

The UXP-HUBA-32x32 comprises of many additional important features including an LCD display for quick configuration and control, a USB port for serial SSH access, 11-step attenuation control on the analog audio outputs, a persistent power option that automatically powers on the switch after a loss of AC power, enhanced security compliance features, and much more.


## Fully Integrated with the NUCLEUS Platform

The UXP-HUBA-32x32 is a managed element of the NUCLEUS platform which is controlled by the NUCLEUS Session Manager – a full featured centralized management server used for the configuration, control, and orchestration of the UXP AV devices. Any combination of UXP AV devices can be interconnected using a COTS (Commercial Off The Shelf) network switch and then configured and managed by the NUCLEUS Session Manager.

## Inputs and Outputs

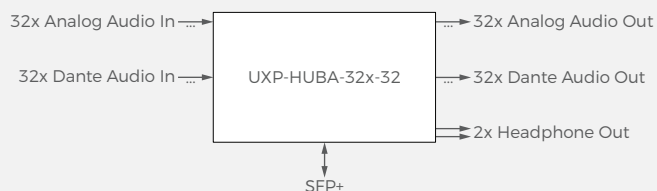

Front



Rear



av.evertz.com

Contents Subject to Change  
Rev. 08

North America/International AV Sales

avsales@evertz.com

+1 905-335-3700

# UXP-HUBA-32x32

## Network-Enabled 32x32 Analog Audio Switch with Dante™



# NUCLEUS

AV OVER IP - SIMPLIFIED

### Specifications

Internal Switching	32x32 analog audio switching
Analog Audio Inputs	32 mono (16 balanced stereo) using modular phoenix connectors
Analog Audio Input Level	Line level
Analog Audio Input Impedance	20 k $\Omega$ / 48kHz
Analog Audio Outputs	32 mono (16 balanced stereo) using modular phoenix connectors
Analog Audio Output Level	Line level
Analog Audio Output Impedance	>5 k $\Omega$ / 48 kHz
Attenuation Control	Line level default, 1dB steps to -9dB and mute on analog outputs
Dante Audio	Dante audio module included Supports 32x32 simultaneous Dante audio streams
Control Port (Out-of-Band)	2x 10/100/1000Base-T RJ45 Ethernet Ports (IEEE 802.3) (1x for Control and 1x for Dante)
Transport Port	2x SFP+ cages. Either can be used for NUCLEUS transport at rates of 1GbE, 2.5GbE or 10GbE (see available accessories)
USB	1x (for SSH configuration)
Control System	NUCLEUS Session Manager
Third-Party Control Support	Yes
In-Band Control	Yes
Web-Based Configuration	Yes (via NUCLEUS Session Manager)
Security Compliance	Compliant with applicable DoD Network Devices Security Technical Implementation Guide (STIG)
Other Features	Persistent power switch, LCD display
Voltage	100-240V / 50-60Hz
Connector	IEC 60320 C14
Power Consumption	130W
Ambient Operating Temperature	32° to 104° F (0° to 40° C)
Relative Humidity	10% to 90% RH (non-condensing)
Dimensions (H x W x D)	1.7in x 17.2in x 9.2in (43.2mm x 436.9mm x 233.7mm) 19in-wide rack mountable with rack ears
Weight	139.15 oz (3945 g)

### Ordering Information

UXP-HUBA-32x32	Network-enabled audio switch: 32x32 analog audio inputs and outputs, 32x32 Dante audio, 1x TDM input and output, 2x SFP+ ports
----------------	--

### Available Accessories

UXP-SFP2-1G-T	SFP+, 1000 BASE-T RJ45, 100m
UXP-SFP-2G5-T	SFP+, 2.5G BASE-T RJ45, 100m
UXP-SFP-10G-T	SFP+, 10G BASE-T RJ45, 30m

EvertzAV, the EvertzAV logo, and VistaLINK are either trademarks or registered trademarks of Evertz Microsystems Ltd. Dante and the Dante logo is a trademark of Audinate Pty Ltd.. Other trademarks, registered trademarks, and trade names mentioned in this document may refer to either the entities claiming the marks and names or their products and are hereby acknowledged. © 2025 Evertz Microsystems Ltd.



av.evertz.com

Contents Subject to Change  
Rev. 08

North America/International AV Sales

avsales@evertz.com

+1 905-335-3700